


fastening module (01067)

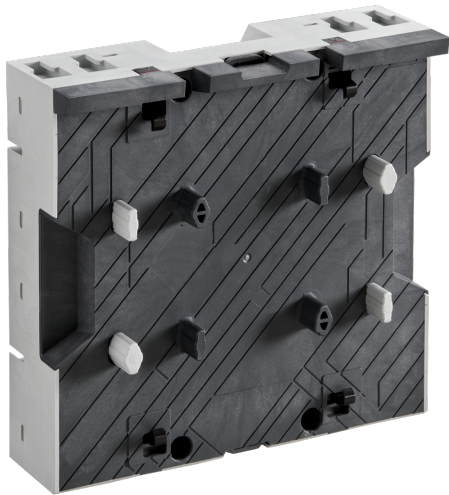

The picture may show a similar product.

Description

Part No.: **01067 000A**
CRITO CrossBoard
fastening module
at rear feeding
no electrical connection
for CrossBoard 800 A 500 - 1100 mm
NEW

System

CrossBoard® 800 A

Product group 07

Subgroup 39

pack size 1

EAN 4021267010676

ETIM 5.0 EC002498
ETIM 8.0 EC002498
ETIM 10.0 EC002498

Approvals

Standards

IEC 61439-1:2020
UL 508

Approvals

UL



for UL feeder circuits >250V

type number: CR-S-200

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V

rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.0 W.

(The power dissipation at full load would be 0.0 W.)

Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

Details UL

Standards

UL 508

for UL feeder circuits >250V

suitable for field-installed conductors

Mechanical data

W x H x D: 200 x 200 x 65

weight: 23.8 kg/100

Material properties

halogen-free: Yes

Application notes

for UL feeder circuits >250V

<https://pim.woehner.de/EN/EN/1000294218>