


## busbar adapter 32 A (32498)

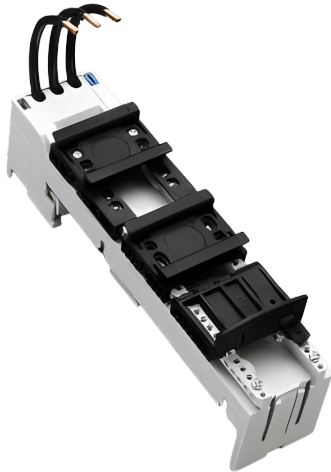

The picture may show a similar product.

### Description

Part No.: **32498** 000

EQUES<sup>®</sup> 60Classic

busbar adapter 32 A

for direct starter ABB MS116, MS132

45 x 200, with leads AWG 10 (6 mm<sup>2</sup>)

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

### System

60Classic

### Advantages of the product

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

Product group 05

Subgroup 21

pack size 4

EAN 4021267324988

ETIM 5.0 EC001531  
ETIM 8.0 EC001531  
ETIM 10.0 EC001531

## Approvals

### Standards

IEC 61439-1:2020  
UL 508

### Approvals

CSA , UL , DNV GL



for UL feeder circuits >250V

type number: EEC6025-L

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>

CCC approval: no certification required

## Technical data

### Details IEC

#### Standards

IEC 61439-1:2020

#### Electrical data IEC

rated current (IEC): 32 A

rated voltage (IEC) AC: 690 V

rated isolation voltage  $U_i$  AC: 800 V

rated surge voltage  $U_{imp}$ : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 1.6 W.

(The power dissipation at full load would be 2.5 W.)

### Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

min. permitted operation temperature -40°C

for direct starter Eaton PKZ0/BG2 and ABB MS116/132

### Details UL

#### Standards

UL 508

for UL feeder circuits >250V

### Electrical data UL

rated current (UL): 32 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 5 kA

3 cycles (without OPD) @ 600 V AC

SCCR protected max.: 65 kA

SCCR: 65 kA with MS116, MS132 25 A / 480 V AC

30 kA with MS116, MS132 12,5 A / 600 V AC

50 kA with MS116, MS132 32 A / 480 V AC

65 kA with MS116, MS132 16 A / 480 V AC

### Mechanical data

W x H x D: 45 x 200 x 63

weight: 36.4 kg/100

poles: 3-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars

### Terminal points

with leads

AWG10 (6 mm<sup>2</sup>)

wire stripping: 9 mm

### Material properties

halogen-free: Yes

## Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.  
the short-circuit capacity of the combination of adapter and motor starter depends on the motor starter

for UL feeder circuits >250V

## Accessories

further accessories



### **32963 000**

side-mounted module for busbar adapters

attachable to both sides

9 x 200

for: EEC60..

<https://pim.woehner.de/EN/EN/1000117963>